


HMF 200 MECHANICAL FEED UNIT (BALL SCREW TYPE)

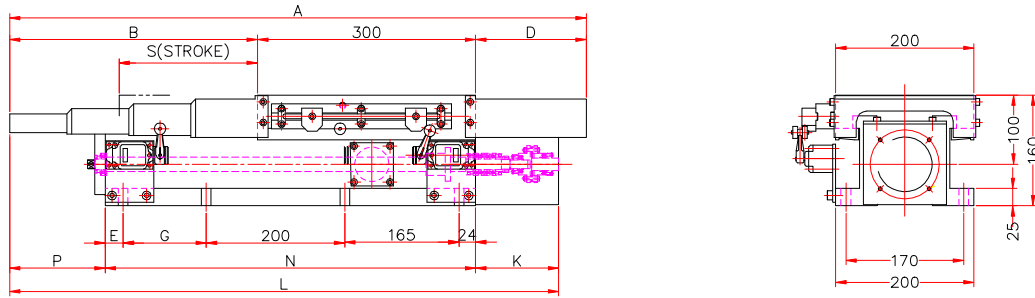


MODEL	A	S STROKE	B	D	E	G	K	N	L	EA	BOLT
HMF200-100	865	100	335	230	26	70	85	485	720	8	M12x50L
HMF200-150	865	150	335	230	26	70	135	485	770	8	M12x50L
HMF200-200	910	200	380	230	21	120	230	530	910	8	M12x50L
HMF200-250	1010	250	480	230	41	200	260	630	1040	8	M12x50L
HMF200-300	1010	300	480	230	41	200	285	630	1065	8	M12x50L

STROKE SCOPE	CYLINDER	ROD DIAMETER	CYLINDER AREA(cm ²)		OPERATING LIQUID(L/min)
			FORWARD	BACK WARD	
100-300	ø50	ø28	19.63	13.47	7.8

제품에 품질향상을 위하여 약간에 변경이 있을수 있습니다. 160707

HHF 200 HYDRAULIC FEED UNIT (CYLINDER TYPE)

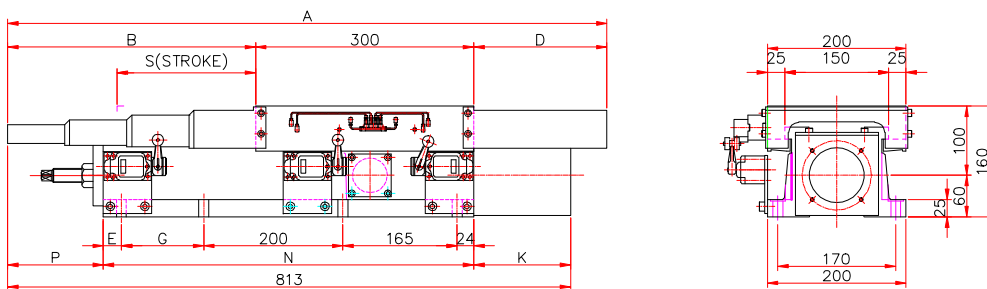

MODEL	A	S STROKE	B	D	E	G	P	K	N	L	EA	BOLT
HHF200-100	865	100	335	230	26	70	150	120	485	825	8	M12x50L
HHF200-150	865	150	335	230	26	70	150	120	485	825	8	M12x50L
HHF200-200	910	200	380	230	21	120	150	120	530	870	8	M12x50L
HHF200-250	1010	250	480	230	41	200	150	120	630	970	8	M12x50L
HHF200-300	1010	300	480	230	41	200	150	120	630	970	8	M12x50L

STANDARD MOTOR	STANDARD COUPLING	STANDARD BALL SCREW	MAX. WEIGHT(KG)	TABLE WEIGHT(KG)	OPTION SPECTION
HG-SR152B 1.5KW(2HP)	DISDWR64C	BNTR2505	450KG	60KG	mitsubishi AC SERVO MOTOR

제품에 품질향상을 위하여 약간에 변경이 있을수 있습니다. 160707